



SOLLEVATORI DOPPIO BRACCIO "SKY 1250 - 1395 - 1400"



Le BBS-1250 BBS-1395 e BBS-1400 sono sponde doppio braccio completamente automatiche con pedana ripiegata trasversalmente, semplici nell'uso, e, adatte al montaggio interno in una vasta gamma di veicoli adibiti al trasporto di persone.



- Piattaforma a griglia antiscivolo ripiegata in due pezzi trasversalmente che permette ampia visuale.
- Funzionamento elettroidraulico con azionamento di due cilindri oleodinamici.
- Movimentazione effettuata tramite pulsantiera a due tasti.
- Ribaltine di sicurezza sulla piattaforma di carico sia anteriormente che posteriormente.
- Sicurezza antiribaltamento.
- Pompa ausiliaria di emergenza.



The BBS-1250 BBS-1395 and BBS-1400 are twin arm lifts, completely automatic with folding platform. They can be mounted internally in a wide range of vehicles for people transportation.

- *Platform with anti-slip surface, when stowed it folds horizontally in half, which allows a good view.*
- *Safety-stop-plates for the wheel chair, placed on the front and back of the platform.*
- *Powered through an electro-hydraulic unit and 2 cylinders.*
- *Controlled through a 2 button pendant switch.*
- *Anti-tilting safety device.*
- *Auxiliary emergency hand pump .*

SOLLEVATORI DOPPIO BRACCIO "SKY 1250 - 1395 - 1400"

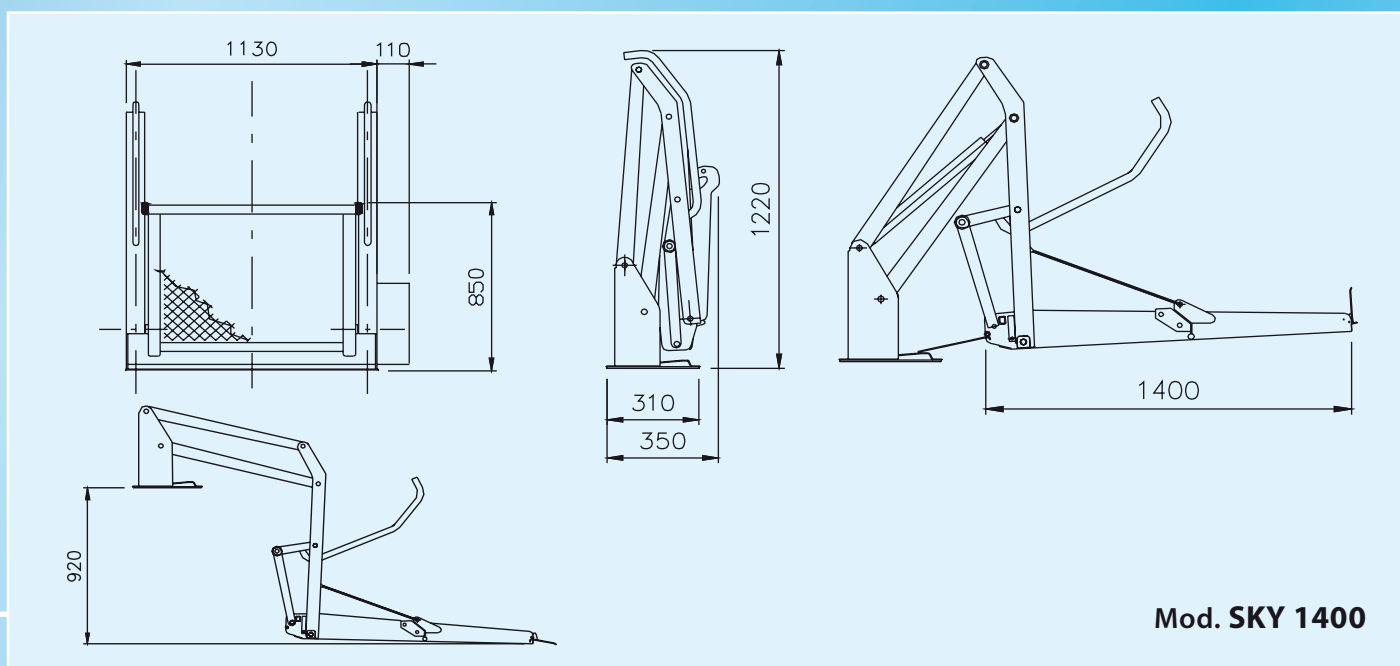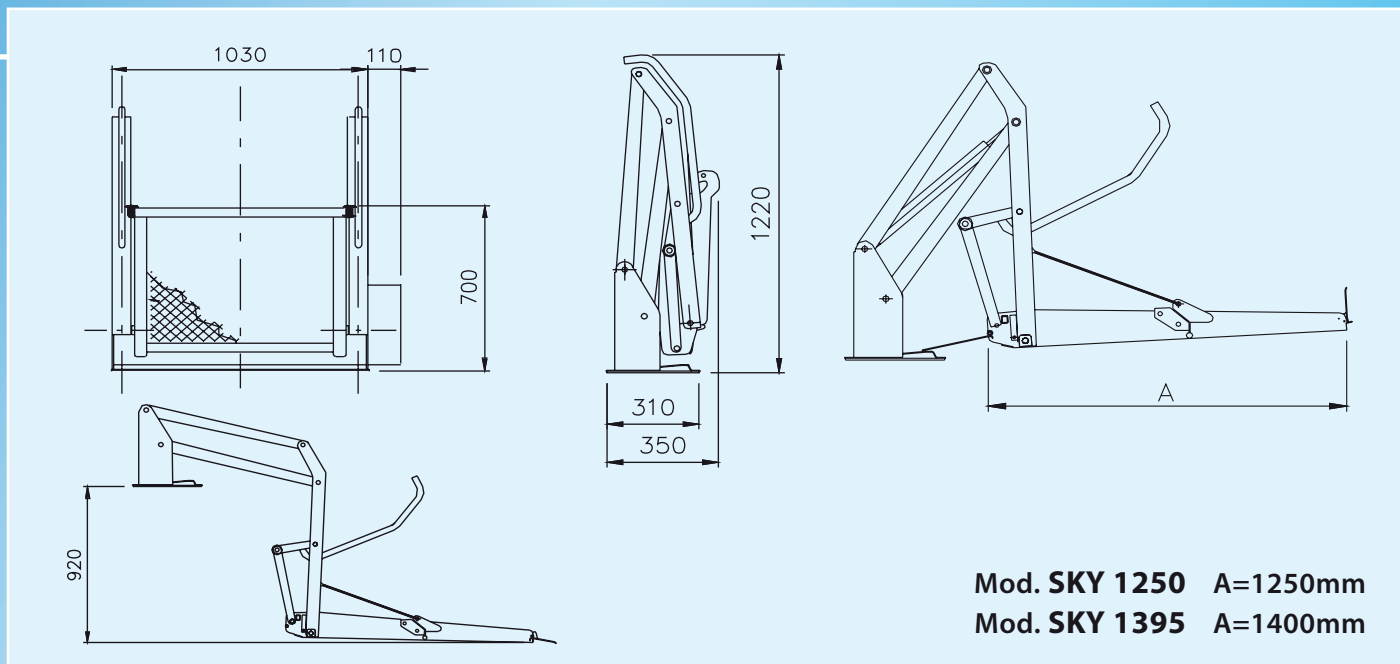

Dati Tecnici

Modello	SKY-1250	SKY-1395	SKY-1400
Portata	320/350 kg	320/350 kg	320 kg
Tara	142 kg	147 kg	151 kg
Alimentazione	12-24 Volt	12-24 Volt	12-24 Volt
Pressione Max	140 Bar	140 Bar	140 Bar
Piattaforma	1250x800 mm	1400x800 mm	1400x900 mm
Altezza elevabile	920 mm	920 mm	920 mm
Pompa ausiliaria di emergenza			

Technical Features

Model	SKY-1250	SKY-1395	SKY-1400
Loading capacity	320/350 kg	320/350 kg	320 kg
Own weight	142 kg	147 kg	151 kg
Electrical System	12-24 Volt	12-24 Volt	12-24 Volt
Max Pressure	140 Bar	140 Bar	140 Bar
Platform Dimension	1250x800 mm	1400x800 mm	1400x900 mm
Max. Floor Height	920 mm	920 mm	920 mm
Emergency auxiliary manual pump.			